


Township of East Rockhill

R-1723 Manhole Frame

Heavy Duty
 Total Weight 470 Pounds
 Specify for R-1723
 1 Catalog number
 2 Detail list if required
 3 Lid without lettering if required

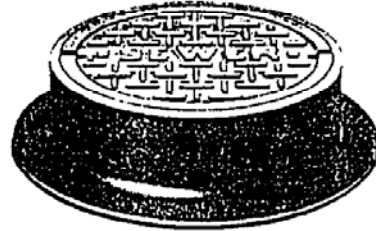

NOTES:


1. ALL MANHOLE FRAMES AND LIDS SHALL BE NEENAH R-1723 OR EQUAL AS APPROVED BY TOWNSHIP.
2. ALL LIDS SHALL BE ORDERED AS SOLID LIDS. VENTED LIDS ARE NOT PERMITTED.
3. REQUIRED LETTERING FOR ALL LIDS SHALL BE "ERT SEWER".
4. APPROVED ALTERNATE IS BOB WOODWARD MANHOLE FRAME AND COVER PATTERN B 776 (WT 475 LBS) WITH TWO 3 1/8 INCH LIFT RINGS.

R-1755 Series Frost-, Watertight Frames Solid Lids and Inner Lids

Heavy Duty
 All units furnished with neoprene gasket, bronze tightening bolt and channel nut locking bar. Lids are provided with type I concealed watertight patches (see page 749 for details). Not suitable for use as a pressure manhole.

Specify
 1 Catalog number
 2 Security watertight patch if required. See R-1755 series page 4 for watertight patches.

Catalog No.	Dimensions in inches				Type Lid Design	Wt. Lbs.
	A	B	C	I		
R-1755-B	23	14 1/2	18	36	2	Type B 465
R-1755-C	24	13 1/2	20	35	2	Type C 475
R-1755-E	26	13 1/2	22	38	2	Type C 705
R-1755-F1	28 1/2	13 1/2	25	36	6	Type C 570
R-1755-G	32	13 1/2	28	46	7	Type B 640

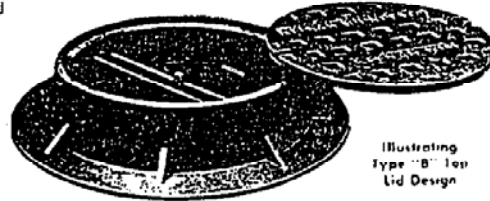

Illustrating Type "B" Top Lid Design



*Furnished with 27" center top lid
 **Base flange (Dimension I) is flattened to 5/8" at four quarter points
 †Some has 4 1/2" anchor holes on 33 1/2" bolt circle

NOTES:

1. WATERTIGHT FRAMES SHALL BE NEENAH R-1755-F1 OR EQUAL AS APPROVED BY TOWNSHIP.
2. REQUIRED LETTERING FOR ALL LIDS SHALL BE "ERT SEWER".

EAST ROCKHILL TOWNSHIP SEWER STANDARDS

Not To Scale SCALE:	STANDARD SELF-SEALING MANHOLE CASTING AND STANDARD WATERTIGHT MANHOLE CASTING	S-7
1/92 DATE		(DWG. No.)